


- Proof Load to 1.5 x S.W.L.
- Light Load of 2% of S.W.L.
- Brake Lock Out Test of between 5% - 7% of the S.W.L.
- Endurance Testing Regime EN13157 1500 cycles European JISB8802 2000 cycles Japanese
- Conforms to EN13157 requirements
- Meets European Machinery Directive and is CE marked
- Twin Pawls as standard
- Heavy Duty Forged Safety Catches
- Hook housing is bolt connected using cap head screws and nyloc nut
- All external nuts are nyloc type
- Side Plates are fitted with caged roller bearing
- Zinc plated Pawl Springs
- Load Chain meets the requirements of European and Japanese standards
- Light weight for easy handling

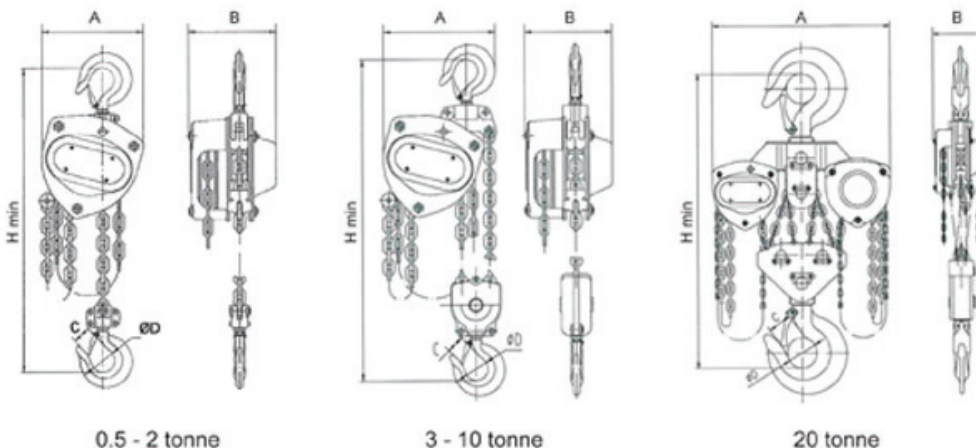

### TECHNICAL SPECIFICATION

Part Code	Capacity tonnes	A mm	B mm	C mm	D mm	H mm	Load Chain Size (mm)	Standard Lift (m)	Mass Kg	Extra Weight per Mtr (Kg)
022.050	0.5	130	125	27	32	280	5.0 x 15	3	7.8	1.4
022.100	1.0	155	134	33	40	306	6.0 x 18	3	11.1	1.7
022.150	1.5	173	151	33.5	42	368	8.0 x 24	3	15.8	2.3
022.200	2.0	185	157	37	46	445	8.0 x 24	3	16.8	2.3
022.300	3.0	235	157	43.5	52	520	8.0 x 24	3	24.2	3.7
022.500	5.0	262	180	51	60	600	10.0 x 30	3	40.0	5.3
022.1000	10.0	433	189	50	85	800	10.0 x 30	3	80.7	9.6
022.2000	20.0	630	200	80	110	1000	10.0 x 30	3	180	19.2